
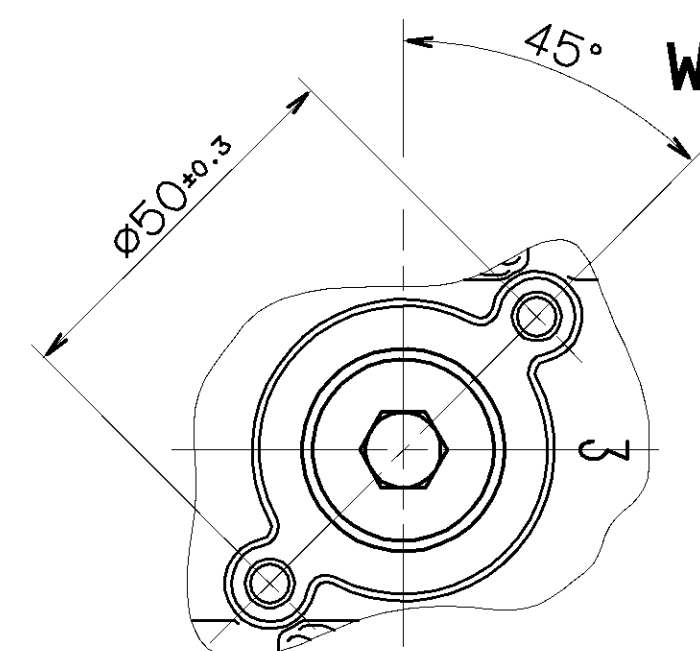
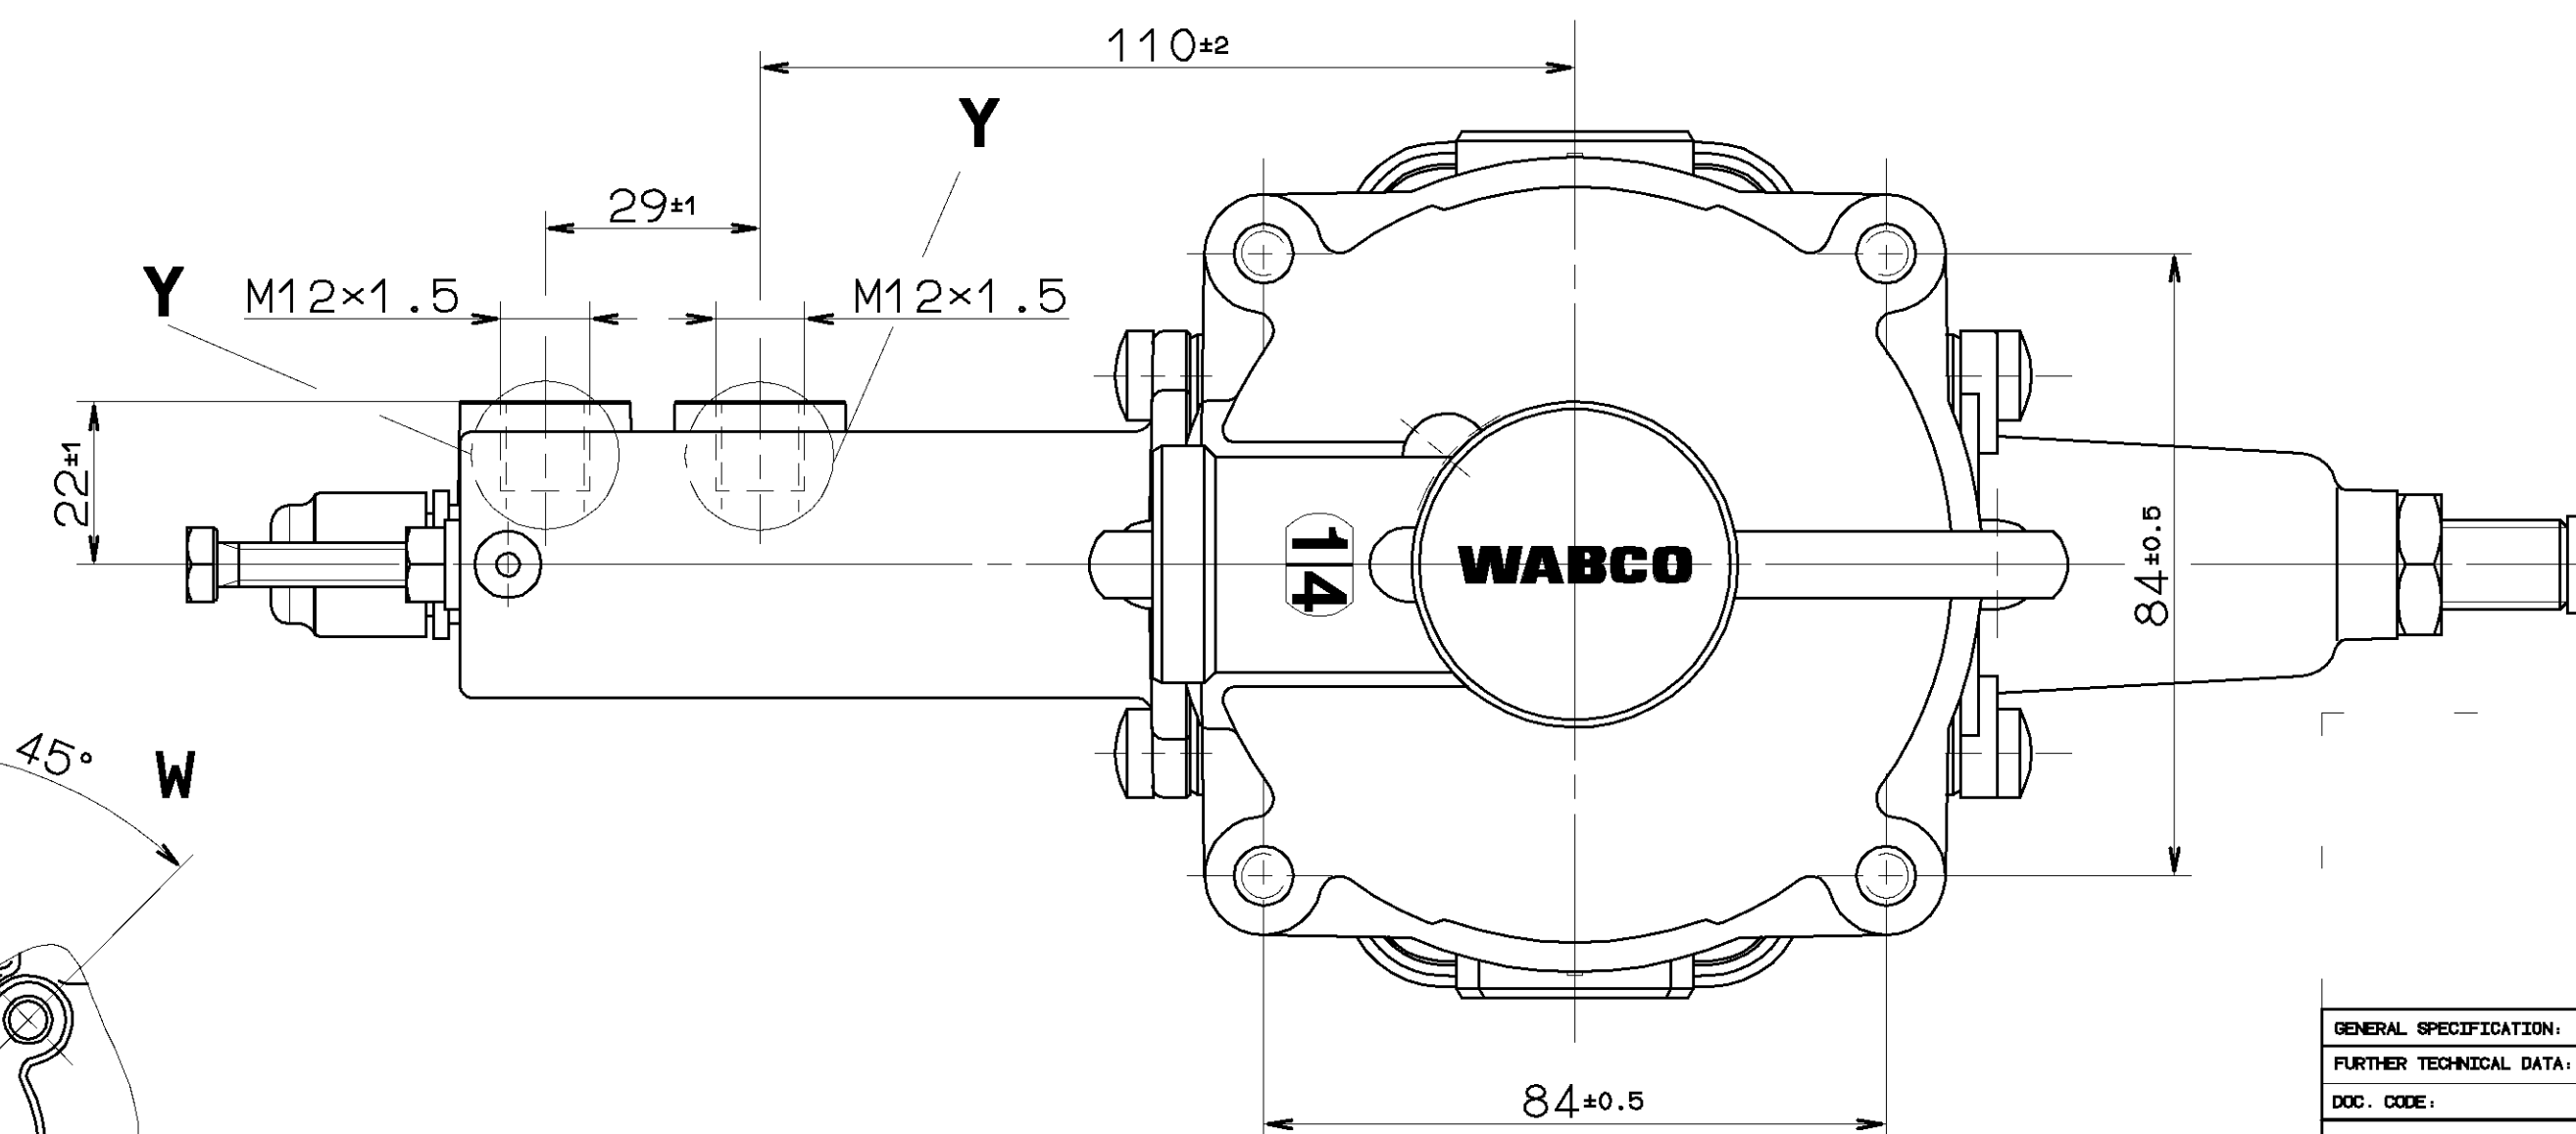


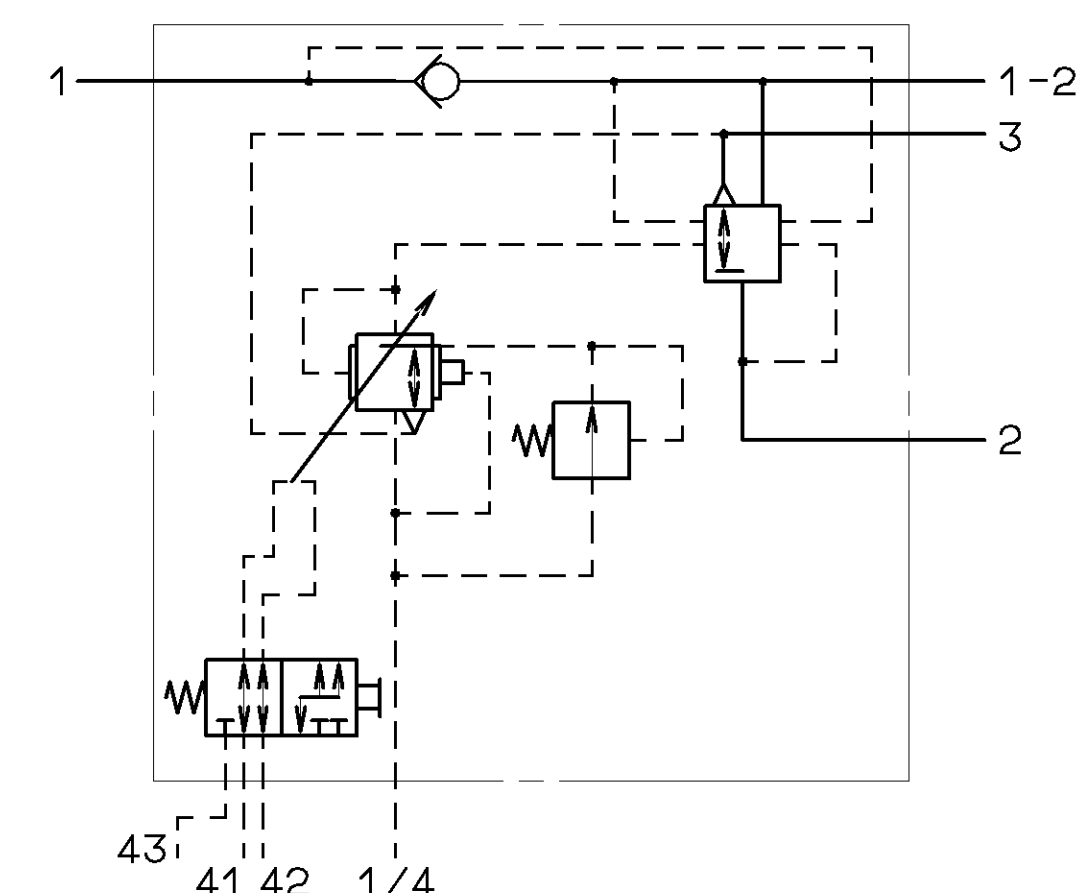

- THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH:
GAMME D'APPLICATION THERMIQUE: -40° ... +80° C
CAMPO DI APPLICAZIONE TERMICA:

GENERAL SPECIFICATION: JED-334				CADA-DRWING COPY/PRINT		WABCO	
FURTHER TECHNICAL DATA:				DATE: SIGNATURE:			
DOC. CODE: SHEET: TO				DRAWN: 89-06-29 BRINK		LOAD-SENSING RELAY EMERGENCY VALVE ALB-ANHAENGER-BREMSVENTIL VALVECORRECTURE RELAIS D'URGENCE SERVODISTRIBUTORE CORRETTORE RELE	
GENERAL TOLERANCES				CHECKED: 89-07-03 FAUK/KIEL/DEME			
RANGE OF NOMINAL DIMENSIONS (± mm)				STANDARDIZATION: 89-07-03 PANTZER			
CLASS 1) ≤50 > 50 ≤180 >180 ≤400 >400							
FINE 0,5 1,0 1,5 2,0				HASS SCALE PRODUCT IDENTIFICATION NO.		DOC. CODE SHEET	
MEDIUM X 1,0 2,0 3,0 4,0				2,4 1:1		475 715 500 0 605 1/1	
COARSE 2,0 3,5 5,0 6,5				SIZE T.R.: A 1 140		SHAPE CODE REPLACEMENT FOR 864 007 466 0 OF 89-01-25	
TAPPED HOLES ACC. ISO 4039 / JED-192		066755 1× B 98-07-01		475 715 500 0			
1) TOLERANCE CLASS APPLIED CROSS-MARKED		045452 4× A 91-01-21		SIZE T.R.: A 1 140			
		DCH-NO. REV. DATE		100mm			
9						PARTIAL CODE 71412 PARTIAL TYPE	