


600/80/TS/521-SH/DH

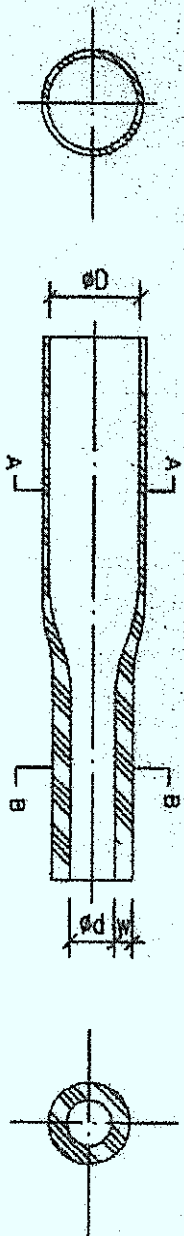

A--A(As Supplied)

B--B(After Recovered)

Note: 1. Shrink Ratio: Longitudinal shrinkage 0~10%.

2. Operating Temperature: -55~125°C;

3. Standard Colors: Black;

4. "L" is based on the requirements of customers.

规格	Dimin (mm)	Dimax (mm)	Width (mm)	规格	Dimin (mm)	Dimax (mm)	Width (mm)
HS-125 1.0	1.0	0.85	0.28±0.1	HS-125 13.0	13.0	8.50	0.65±0.1
HS-125 1.5	1.5	0.85	0.32±0.1	HS-125 14.0	14.0	7.00	0.65±0.1
HS-125 2.0	2.0	1.00	0.35±0.1	HS-125 15.0	15.0	7.50	0.70±0.1
HS-125 2.5	2.5	1.30	0.38±0.1	HS-125 16.0	16.0	8.00	0.70±0.1
HS-125 3.0	3.0	1.50	0.40±0.1	HS-125 18.0	18.0	9.00	0.80±0.15
HS-125 3.5	3.5	1.80	0.42±0.1	HS-125 20.0	20.0	10.0	0.85±0.15
HS-125 4.0	4.0	2.00	0.45±0.1	HS-125 22.0	22.0	11.0	0.88±0.15
HS-125 5.0	5.0	2.50	0.55±0.1	HS-125 25.0	25.0	12.5	0.90±0.15
HS-125 6.0	6.0	3.00	0.55±0.1	HS-125 28.0	28.0	14.0	0.90±0.15
HS-125 7.0	7.0	3.50	0.55±0.1	HS-125 30.0	30.0	15.0	0.95±0.15
HS-125 8.0	8.0	4.00	0.60±0.1	HS-125 35.0	35.0	17.5	1.00±0.15
HS-125 9.0	9.0	4.50	0.60±0.1	HS-125 40.0	40.0	20.0	1.00±0.15
HS-125 10.0	10.0	5.00	0.60±0.1	HS-125 45.0	45.0	22.5	1.05±0.15
HS-125 11.0	11.0	5.50	0.60±0.1	HS-125 50.0	50.0	25.0	1.00±0.15
HS-125 12.0	12.0	6.00	0.60±0.1	HS-125 60.0	60.0	30.0	1.30±0.2



长春海达化学有限公司

CHANGSHUN HEIDA CHEMISTRY CO., LTD.

No.	Date	Modification	Mender	Ratifier

Material	Radiation Crosslinking Polyolefin	Product	Low temperature fire-retardant heat shrinkable tubing
Chief Engineer	安景荣		
Designer	盛利		
Prod	王永爱		
Drawer	王明环	Register No.	
Date	October 15, 2008	Drawing No. HD/HS-125/SJ08/003	

Production Drawing