


**601X
SERIES**

C **UL** US



SPECIFICATION

RATING	: 16A 125VAC , 10A 277VAC (UL,C-UL) 16(6)A 250V~T125 (ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 125 °C
ELECTRICAL LIFE	: 10,000 CYCLES

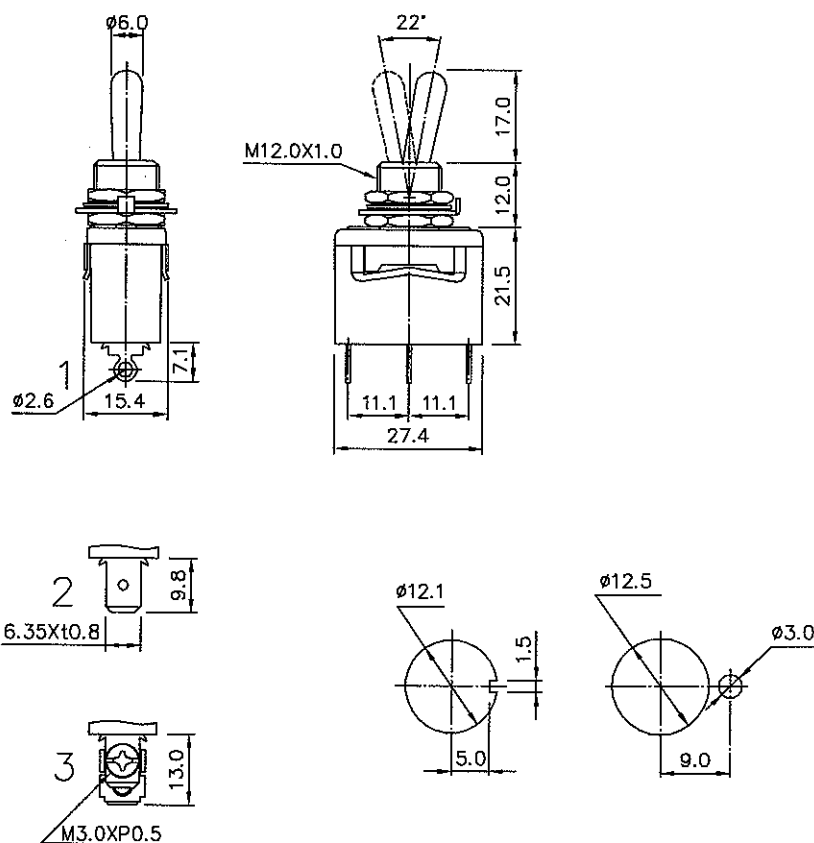

PANEL LAYOUT

() :MOMENTARY

SWITCH FUNCTION					
MODEL NO.	KEY WAY	KEY WAY	KEY WAY	OPERATIONS	APPROVAL
6011	ON	----	OFF	SPST	C UL US
6012	ON	----	ON	SPDT	
6013	ON	OFF	ON	SPDT	
6014	(ON)	OFF	----	SPST	
6015	ON	----	(ON)	SPDT	
6016	(ON)	OFF	(ON)	SPDT	
6017	ON	OFF	(ON)	SPDT	

TERMINAL'S TYPE	
1	SOLDER TERMINAL
2	QUICK TERMINAL
3	SCREW TERMINAL