


12. SELECTING ACCESSORIES

Fig 42. Specifications of Rubber Flex Chain (Short Type)

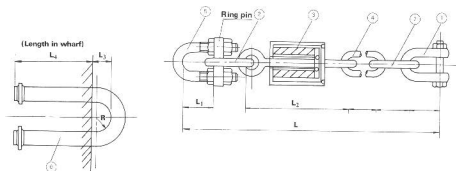

No.	Parts	Material	No.	Parts	Material
1	Shackle	Carbon steel (Galvanized)	4	Common link	Mild steel (Galvanized)
2	End link	Mild steel (Galvanized)	5	Turn-buckle	Carbon steel (Galvanized)
3	Rubber flex	Rubber & Mild steel (Galvanized)	6	U-Anchor	Carbon steel (Galvanized)

Note: Necessary length can be adjusted by adding some links to minimum total length (L).

Unit: mm/inch

Code No.	Breaking load tons KIPS	1	2	3	4	5			6				Minimum Total Length L
		Shackle type, size	Dia. [φ]	L ₁	Dia. [φ]	Thread Dia. MDφ	Assembled length L ₂	Working length	Dia. [φ]	Rad. R	Length of reach L ₃	L ₄	
RSB020S	20 44.1	S830	22 0.87	325 12.8	20 0.79	M36	105 4.1	110/61 4.3/2.4	38 1.5	61 2.4	96 3.4	320 12.6	889 35.0
RFB040S	40 88.2	S842	33 1.30	456 18.0	29 1.14	M52	147 5.8	152/83 6.0/3.2	55 2.2	83 3.3	118 4.6	440 17.3	1242 48.9
RFB060S	60 132.3	S850	40 1.57	556 21.9	36 1.42	M60	175 6.9	180/95 7.1/3.7	65 2.6	104 4.1	149 5.9	550 21.7	1496 58.9
RFB080S	80 176.4	S860	44 1.73	567 22.3	40 1.57	M68	210 8.3	215/106 8.5/4.2	75 3.0	120 4.7	170 6.7	630 24.8	1684 66.3
RFB115S	115 253.5	S870	55 2.17	725 28.5	50 1.97	M80	245 9.6	250/113 9.8/4.4	90 3.5	144 5.7	204 8.0	760 29.9	2059 81.1
RFB150S	150 330.7	S875	66 2.60	835 32.9	60 2.36	M90	262.5 10.3	267.5/124.5 10.5/4.9	100 3.9	160 6.3	227 8.9	800 31.5	2312 91.0

Note: Working load is less than 1/3 of breaking load.